

FIG.



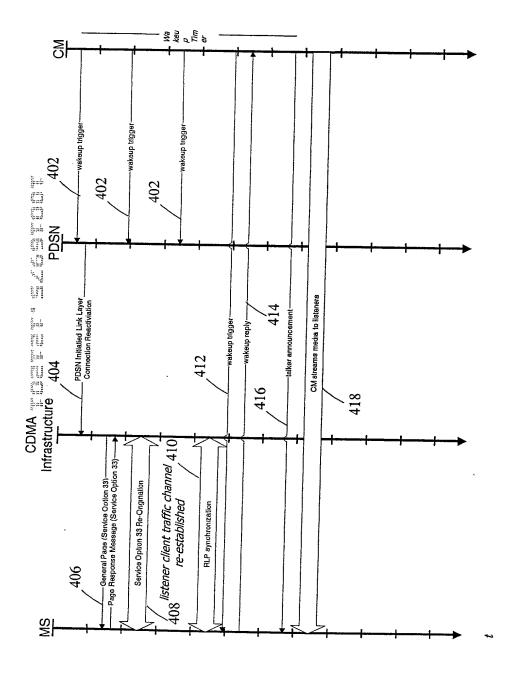



FIG. 4

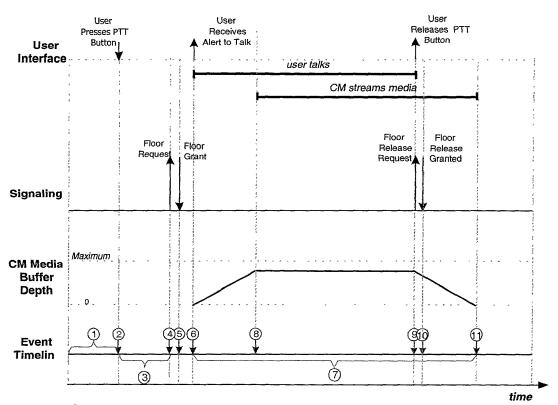

- ① Group is dormant.
- ② User presses the PTT button.
- 3 Client re-establishes a packet data connection.
- Packet data connection has been established; floor request is transmitted to CM
- © Client Receives grant of floor from CM.
- (i) User is alerted to begin speaking; media is streamed to
- (7) CM buffers media from talker
- ® CM receives indication that listener phones have re-established their traffic channels, and begins streaming media tolisteners' phones.
- User finishes talking and releases his PTT button; floor release request is
- <sup>19</sup> Floor release is granted to
- ① CM stops streaming media to

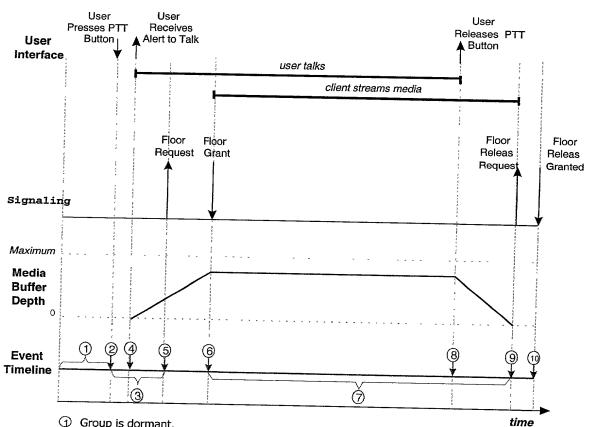

- Group is dormant.
- ② User presses the PTT button.
- ② Client begins process of re-establishing a packet data traffic channel.
- Client alerts user that floor has been granted after a configurable delay and begins buffering user media.
- © Client successfully re-establishes traffic channel. Client transmits request for floor to CM.
- Client is granted the floor by the CM
- Client streams buffered media to CM.
- $\ensuremath{\mathfrak{B}}$  User releases the PTT button. Client stops buffering media.
- Client finishes streaming buffered media to CM, requests release of the floor by the CM.
- (i) Client receives acknowlegement of floor release from the CM

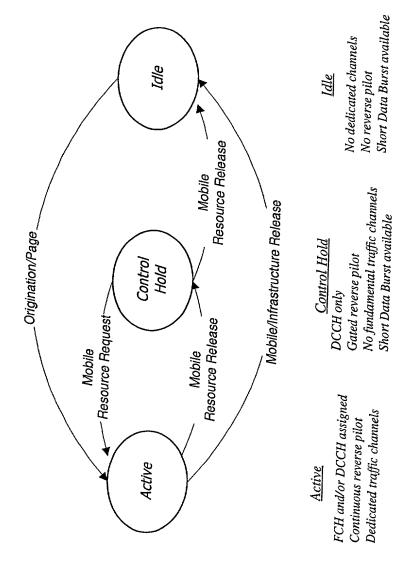

FIG